Parklet Pilot Program Manual







Morgan Hill Parklet Pilot Program About Parklets	Pg. 4
Program Goals	
Parklet Standards and Responsibilities	Pg. 5
Location Criteria	
Parklet Eligibility	
Parklet Cost	
Basic Requirements	
Parklet Standards	
Parklet Application Process	Pg. 10
Preliminary Application	
Encroachment Permit	
Contacts	
Application	

About Parklets

A parklet activates the street by replacing one or more on-street parking spaces with pedestrian oriented amenities such as seating, planting, and/or elements of play.

Program Goals

Support downtown Businesses by adding unique opportunities in the public sphere.

Slow down traffic.


Make downtown interesting and vibrant.

Promote walkability.



Support the downtown strategies outlined in the Economic **Blueprint, Station Area** Master Plan, Downtown Specific Plan, **Placemaking Investment Strategy, &** 2035 General Plan.

Location Criteria

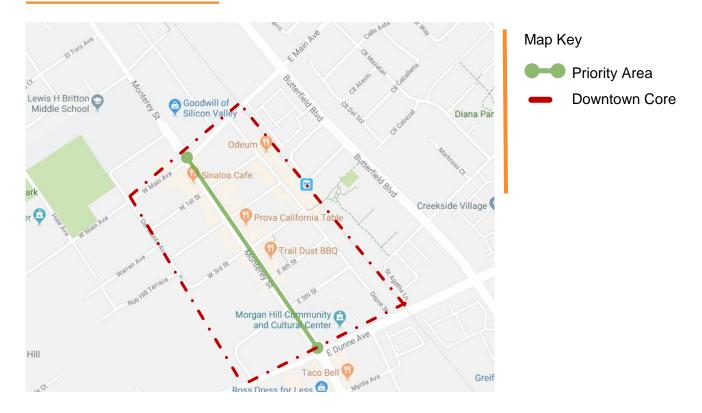

The Parklet Pilot Program will be available only in the downtown core. The priority area for parklets are on Monterey Road between Main and Dunne Avenue as illustrated. However, installation of a parklet in the downtown core, as outlined in red in the map, will be considered on a case by case basis.

Parklet Eligibility

Eligible applicants include:

- 1. Downtown businesses
- 2. Community-based organizations

Parklet Cost

Before installing a parklet there are costs that should be taken into consideration:

- 1. Parklet Cost. Parklets can range in cost. The typical parklet with a platform (materials and installation), planters, tables, and chairs is approximately \$16,000.
- 2. City Fees. The City will require an Encroachment Permit which costs \$598. A refundable deposit of \$2,000 is required when playing for the encroachment permit. This deposit will be returned when the parklet owner has completed their term with the parklet program and restores the parking stall to its original condition.
- 3. General Liability Insurance. General liability insurance of up to \$1,000,000 in coverage is required to receive an Encroachment Permit. General Liability insurance can range from \$300 to \$1,000 a year.
- 4. Maintenance and upkeep. This will vary project by project but should be taken into consideration as the parklet will need to be kept in good repair year-round.

Basic Requirements

MOVEABLE FURNITURE	 Secure furniture overnight or when not in use. Store unsecured furniture and equipment after business hours.
BUILT FACILITIES	 Must meet development standards (Page 8) Develop plans with a Licensed B or C-5 Contractor Parklets will meet Americans with Disabilities Act standards Parklet built to approved plan by general contractor.
UPKEEP	 Keep all plants healthy and replace dead plants. Keep parklet free of debris, grime, and graffiti. Keep the parklet free of pests. Sweep out debris from under parklet on an as-needed basis to allow proper drainage. Adequately maintain all surfaces of the parklet so they are clean and safe for community use. Keep any furniture- such as tables and chairs, and benchesclean. Repair and/or replace tables, chairs, and other elements of the parklet as needed.
PARKING ZONES	 Parklets are not permitted in an existing tow away, commercial loading, disabled parking, red, or white zones. Parklets must have adequate clearance for automobiles to turn in and out of nearby driveways.
PUBLIC UTILITIES	 Parklets must not cover any utility or manhole covers. The design must provide access to public utilities, access panels, valves, building standpipes, and other features. The parklet design must provide for proper street drainage. Space underneath and surrounding parklets shall be kept clean and shall be maintained free of debris and obstructions to allow for property drainage.


Parklet Standards

Materials

If not proposing a decked parklet (See Page 9), the parklet can utilize the existing road as the ground for the parklet. Painting the road, poured concrete, or loose particles such as sand or stone are not permitted.

Location

Parklets shall be located at least one parking space away from an intersection or street corner unless adjacent to a curb-extension or bulb-out. Parklets near an entrance only driveway must be at least two-feet from the driveway apron. Near a two-way driveway requires two-feet clear, a wheel stop, then four-foot clearance from parklet barrier.

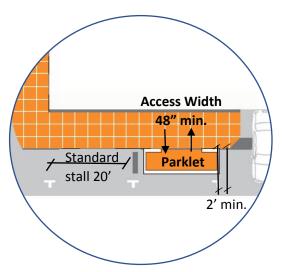

Access

The width of the entrance(s) to the parklet should be at least 48-inches wide.


Drainage


- Parklets cannot impede the flow of curbside drainage.
- 2. The parklet design shall include a 6-inch clearance from sidewalk curb along the entire length of the parklet.
- 3. For parklets that include a platform, refer to Parklet Platform standards below.

Defined Barrier

The parklet must be a defined space separating the space for pedestrians from bicyclists and vehicular traffic. These requirements include:

- 1. Wall or fence able to withstand 600 lb per linear foot.
- 2. Parklet barrier must be 3-feet clear from the adjacent vehicular travel lane.
- 3. The height of a barrier shall be a minimum of 42-inches tall maximum of 45-inches tall.
- 4. A wheel stops shall be installed a minimum of 4-feet away from the end of the parklet where the parklet is adjacent to a parallel parking stall.

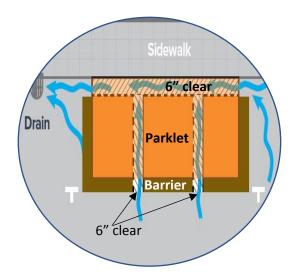

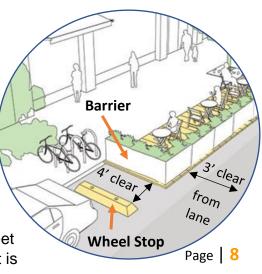

Additional Standards for Platform Parklets

Platform Materials

- 1. Platform surface materials should be textured or treated with a non-skid coating to ensure a safe walking surface.
- 2. Paneled decking is preferred. Allows for easy access under the deck if needed. Easy to replace damaged pieces.
- 3. Parklet floor load-bearing weight minimum is 100 pounds per square foot.

Platform Extension


- 1. The deck of a parklet platform shall be flush with the sidewalk without a horizontal or vertical separation greater than ½ inch.
- 2. Vertical separation between ¼ inch and ½ inch high shall be beveled with a slope not steeper than 1:4 (25%).

✓ Securing Structure

Bolting into the street or penetrating the surface of the road in anyway is prohibited. (Not including wheel stop)

Drainage

- 1. Parklets cannot impede the flow of curbside drainage.
- 2. All parklets must provide access through the parklet platform to the gutter adjacent to the curb.
- 3. A six-inch by six-inch minimum clear gutter space must be provided along the entire length of the parklet adjacent to the curb. Barrier adjacent to vehicle lane should incorporate two six-inch clearance paths (see drainage image on page 8)

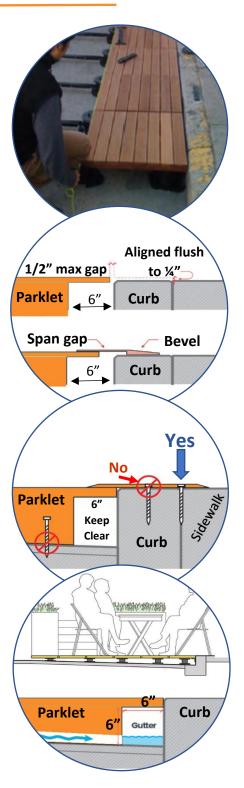

Parklet Application Process

The process to build a parklet consists of a two-step process:

- 1. **Preliminary Application** The preliminary application is intended to be exploratory where the applicant can share their ideas for a parklet with the City.
- 2. **Encroachment Permit** The encroachment permit submittal requires the plan and application to be completed with payment of fees.

The following pages will walk through the items needed for both the preliminary application and the encroachment permit submittal requirements.



Preliminary Application

Applicants should submit Parklet Preliminary Application with the following information:

1. Photos of Site

The proposal should include at least three photos showing the proposed parking space(s) to be converted into a parklet. The three photos must show the parking space from across the street and one photo from each end of the proposed parklet.







Left Side Right Side Across

2. Project Description

The proposal needs a brief description of the parklet concept, this should include:


- General parklet concept
- How the parklet will be activated
- Any potential programming envisioned

You may bring in photos or a hand drawling to initially discuss your plan. Prior to encroachment permit submittal, a detailed plan showing compliance with the parklet standards will be required. Plans should be completed by a general contractor.

3. Initial Site Plan

Provide detailed and measured drawing showing:

- A. Parklet dimensions
- B. Identify parklet materials to be used (can bring photos, pamphlets, or pieces of material for examples)
- C. Compliance with parklet standards
- D. Width of adjacent sidewalk
- E. Location of fronting business and neighboring businesses on both sides.
- F. Location of any above ground fixtures (trees, fire hydrants, poles, bike racks, street lights, etc.)
- G. At-grade roadway markings (color curbs, parking stall markings, etc.)
- H. At-grade utilities (panels, storm drains, manhole covers, etc.)

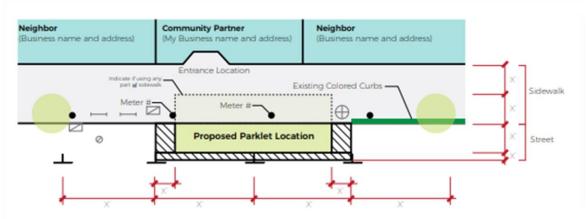

4. When the proposal is ready for submittal please submit the application in person at City Hall to Economic Development Staff or by email to:

econdev@morganhill.ca.gov

Development Services Address: 17575 Peak Ave. Morgan Hill, CA

Encroachment Permit Phase

When ready to apply for permits, please visit City Hall.

Development Services Address:

17575 Peak Ave.

Morgan Hill, CA

1. Design Review

Design Review is an integral part of the permitting process which ensures the site, architectural design and landscape design meet City code and ensure that project will fit within the downtown as proposed.

- All parklets require Design Review. Design Review will take place at both the preliminary permit and encroachment permit phase.
- This review typically does not add any time to the project lead time.
- Provide all materials with any suggested corrections from the preliminary application.

2. Notification

Upon approval of the proposal, the City will create a notification sign to inform the community of the intent to install a parklet. You must post the sign in front of the proposed parklet's location for 10 days. The notification must be visible to the public. If you are the adjacent business, then the sign can go in the window of that business.

3. Encroachment Permit

An Encroachment Permit is written permission to encroach within the City's public right-of-way.

- All parklets will require an Encroachment Permit before a parklet can be installed.
- The Encroachment Permit fee for parklets is \$589, plus the \$2,000 deposit that will be reimbursed when the parklet is cleared and returned to its original condition.
- Insurance for the parklet is required and part of the Encroachment Permit process
- This permit typically takes between two and three weeks to process.
- Under the Parklet Pilot Program, the initial Encroachment Permit will be valid for two-years with a one-year from date of approval.

Contacts

If you have any questions regarding the parklet process feel free to email Morgan Hill's Economic Development Staff at econdev@morganhill.ca.gov or call 408.310.4633.

CITY OF MORGAN HILL

Preliminary PARKLET APPLICATION

Please complete the following parklet proposal form and submit in person at City Hall to Economic Development Staff or by email to: econdev@morganhill.ca.gov

Applicant Information	Date:	
Name: Business/Org	Business/Organization:	
Business/Organization Address	<u> </u>	
Email:	Phone:	
Proposed Parklet Location Nearest Street Address:	Staff Use ONLY Additional Parklet Information Please attach ALL of the following materials	
Neighboring Businesses:	Photos of Site Include 3 photos showing the proposed parking space(s) to be converted into a parklet. The three must show the parking space from across the street and one photo from each end of the proposed parklet.	
Date Public Notification Sign Up:	Project Description Submit a project description of your proposed parklet. The description should include the general parklet concept, how the applicant envisions activating	
I acknowledge this is the preliminary application and will apply for the encroachment permit if this preliminary application is approved. No work on	the parklet and any potential programming that is envisioned.	
the parklet shall begin until an encroachment permit is issued.	Initial Site Plan Provide a detailed and measured drawing of the parklet, sidewalks, etc. See page 10 of the Parklet Pilot Manual for details of what must be included in the Initial	
Applicant Signature	Site Plan.	
Staff Use Only		
	ed: Approved: Yes No No	
Reviewer:		